

# LED T8 INTEGRATED TUBE LIGHT (SEAMLESS)

## INT-4FT-M40 | INT-8FT-M72

### DESCRIPTION

T8 INTEGRATED TUBE | 4ft/8ft | Wattage Selectable | CCT Selectable | Seamless | Linkable & Plug and Play



### CONSTRUCTION

PC + Aluminum | T8 Integrated LED Tubes Seamless

### ELECTRICAL

Runs on 120-277V line voltage

### LINKABLE

The ability to link multiple tube lights together allows you to customize the lighting arrangement to suit your space perfectly, providing uniform lighting across larger areas.

### EASY INSTALLATION

The T8 LED Integrated Tube light doesn't need a ballast fixture, making setup easy. Just connect the provided connector and secure the fixture with the included clips and screws. This simple installation saves on maintenance and costs

### LONGEVITY

LED lighting is known for its extended lifespan, reducing the need for frequent replacements and minimizing maintenance efforts.

### APPLICATIONS

From residential spaces to commercial establishments, these tube lights find utility in a wide range of settings, including homes, offices, retail stores, garage, workshops, basement and more.

### LISTING

ETL, DLC, FCC

### WARRANTY

5 Years Limited Warranty, Rated for 50,000 hours.

### FEATURES

Bulb Type	T8 LED
Size	4FT   8FT
Wattage	4FT: 22W/30W/40W(Selectable) 8FT: 45W/60W/72W(Selectable)
CCT	3500K/4000K/5000K/ 5700K/6500K (Selectable)
Efficiency	125lm/W
Input Voltage	120-277V AC
Frequency Range	50/60Hz
Linkable	Yes
Cover	Frosted / Clear
CRI	>80
PF	>0.95
THD	<=20%
Beam Angle	120°
IP Rating	IP 40
Lifetime	50,000 hours

# LED T8 INTEGRATED TUBE LIGHT(SEAMLESS)

INT-4FT-M40 | INT-8FT-M72


## ORDERING INFORMATION

Model	Size	Wattage	Voltage	Lumens	Efficacy	CCT	Certifications
INT-4FT-M40W-XXK	4FT	22W, 30W, 40W (Selectable)	120-277V	2750lm, 3750lm, 5000lm	125 lm/W	3500K, 4000K, 5000K, 5700K, 6500K (Selectable)	ETL/DLC
INT-8FT-M72W-XXK	8FT	45W, 60W, 72W (Selectable)	120-277V	5625lm, 7500lm, 9000lm	125 lm/W	3500K, 4000K, 5000K, 5700K, 6500K (Selectable)	ETL/DLC


## PHYSICAL SPECIFICATIONS

Unit: mm/inch

### 4FT

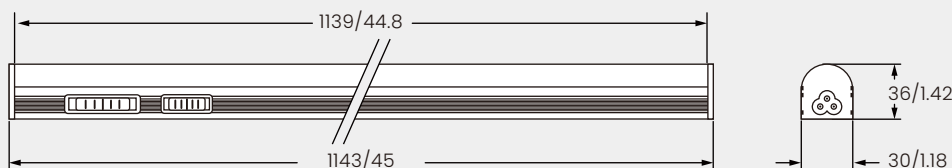


### 8FT

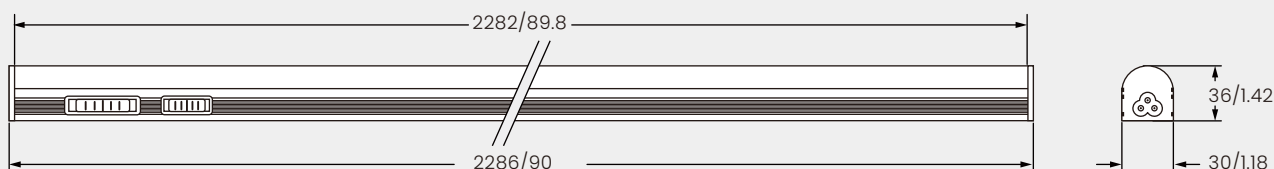

Dimensional tolerances: (+1.5mm, -1.0mm)


## WATTAGE & CCT SELECTION

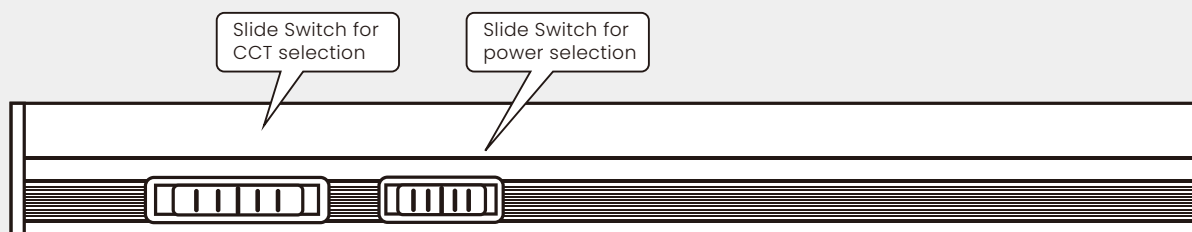

For the product with Slide Switch of wattage or CCT selection, please select the wattage or CCT needed before installation.


## INSTALLATION INSTRUCTIONS

1

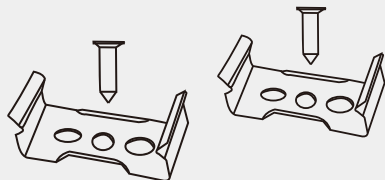


Confirm the buckle's position on the wall.

2



Screw the buckles on the wall.


3

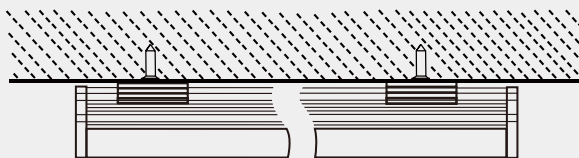


Fix the light into the buckles

## CONNECTION INSTALLATION

### Method 1: Connector

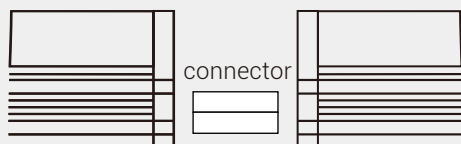


Please find the connector in the accessories bag.

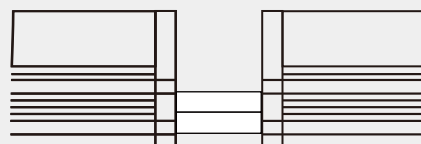

Plug the connector into the tube.

### Method 2: Middle Connector

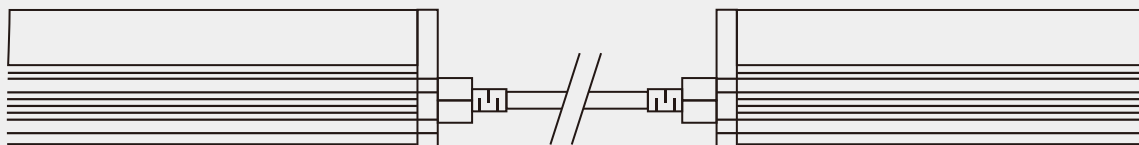

Please find the middle connector, Plug the middle connector into the tube.