



LED VAPOR TIGHT LIGHT



Product: LED VAPOR TIGHT LIGHT

Model: JL-VAP-4FT-M50W-CCT

Features


- **-Construction:** LED Vapor Tight Is Manufactured Of Impact Resistant Plastic Resins That Are Designed To Keep Moisture, Dirt And Dust Out. To Protect Interior Wires And Components Inside The Fixture.
- **-Electrical:** Luminaire Is Built With The Highest Quality Driver That Is Universal Voltage (120V-277V), Uses Long Lasting, Highly-Efficient LED Packages.
 - **-Optical System:** Designe To Reduce Glare And Improve Light Distribution Through Precision Formed.
- **-Dimming:** Continuous Dimming (0-10V) Comes Standard.
- **-Warranty:** 5 Years Limited warranty, Rated For 50.000 Hours (Refer To Your Warranty Documentation For More Information).

Details


Item	Model	LED VAPOR TIGHT LIGHT		
General performance	Power	25W		
		30W		
		35W		
		40W		
		50W		
	Luminous Efficacy	125-130LM/W		
	Default Driver Input	50/60Hz		
	Color Temperature	3500K-6500K		
	LED			
Electrical	Power Factor	>0,9		
	Input Voltage	120-277V AC		
	THD	<=20%		
Physical	Weight	4.1lbs		
	Dimension	4FT		
	Housing			
	Beam Angle	120°		
	Lens			
	Mounting			
	Operation Temperature	-4°F To 113°F -20°C To 45°C		
	Humidity			
	Finish			
	IP rated	IP65 CRI >80		

Certificate	Certificate	ETL, DLC
	Material Usage	
	Driver Class	
	LED Class	

Physical Specifications

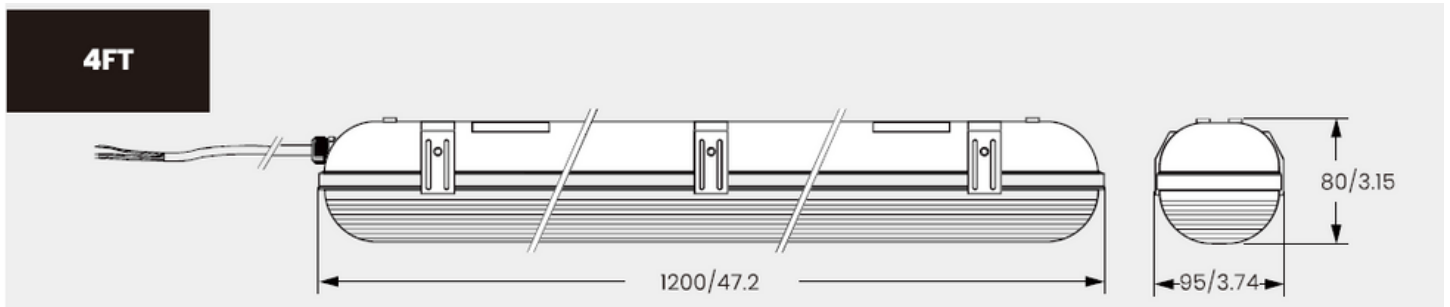

Photometric Data

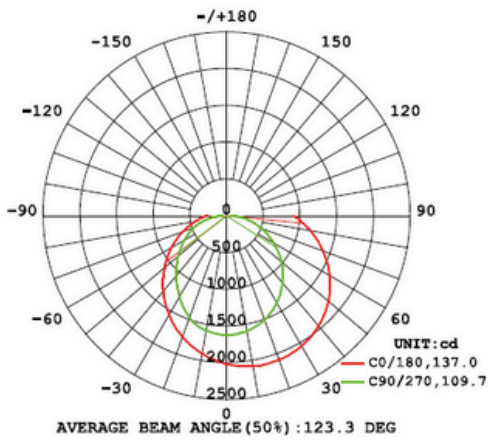

4FT

Flux out: 2948 lm

Height	Eavg, Emax	Angle: 91.55deg	Diameter
1m	875.0, 20311x		205.59cm
2m	218.8, 507.81x		410.99cm
3m	97.23, 225.71x		616.49cm
4m	54.69, 126.91x		821.98cm
5m	35.00, 81.241x		1027.48cm
6m	24.31, 56.421x		1232.97cm
7m	17.86, 41.451x		1438.47cm
8m	13.67, 31.741x		1643.96cm
9m	10.80, 25.971x		1849.46cm
10m	8.750, 20.311x		2054.95cm

Certificate



