

8FT T8 LED TUBE LIGHT (TYPE B)

ALT8-8FTAB-M48W-CCT

DESCRIPTION

T8 LED Tube | Type B | FA8 Base | Double Ended | 24-48W | 3500K-6500K | 8FT



CONSTRUCTION

Plastic / Aluminum | 8' LED T8 Tubes | FA8 Base

ELECTRICAL

Bypass ballast runs on 120-277V line voltage.

INSTALLATION

Type B (Double-end Wiring).

APPLICATIONS

Office Buildings/Schools/Factories/Hospitals
Suitable for dry and damp indoor locations.
Working temperature -4°F to 113°F (-20°C to 45°C).

LISTING

ETL, DLC, FCC

WARRANTY

5 Years Limited Warranty, Rated for 50,000 hours.


FEATURES

Bulb Type	T8 LED
Base Type	FA8
Size	8FT
5Wattage	24W/30W/36W/42W/48W (Selectable)
5CCT	3500K/4000K/5000K/ 5700K/6500K (Selectable)
Efficiency	126-150lm/W
Input Voltage	120-277V AC
Frequency Range	50/60Hz
Ballast Compatibility	Type B
Wire Connection	Double-end Wiring
Cover	Frosted / Clear
CRI	>80
PF	>0.95
THD	<=20%
Beam Angle	120°
IP Rating	IP 20
Lifetime	50,000 hours

ORDERING INFORMATION

Model	Size	Wattage	Voltage	Lumens	Efficacy	CCT	Dimensions
ALT8-8FTB-M48W-CCT	8FT	24W, 30W, 36W, 42W, 48W (Selectable)	120-277V	3600lm, 4380lm, 5000lm, 5550lm, 6050lm	126-150lm/W	3500K, 4000K, 5000K, 5700K, 6500K (Selectable)	92.78"L x 1.13"W x 1.29"H

PHYSICAL SPECIFICATIONS

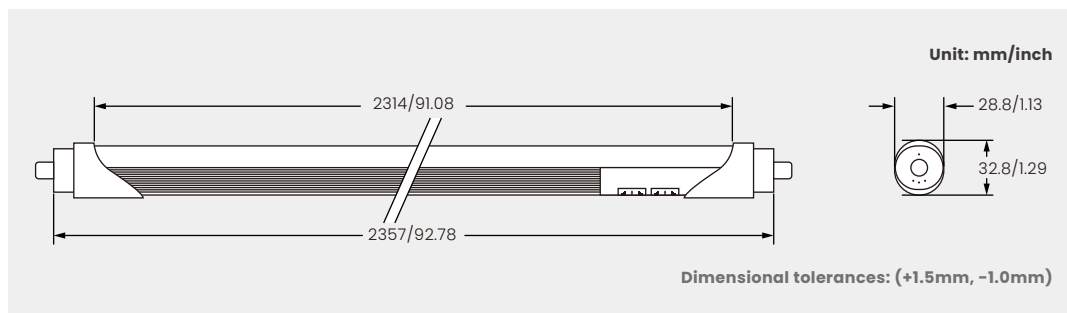


WEIGHT INFORMATION

1 Piece

1 lbs.

WATTAGE AND CCT SWITCHABLE

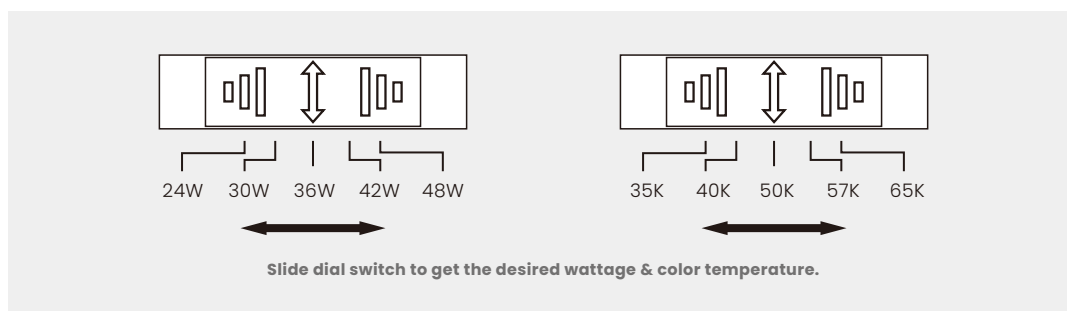

INSTALLATION INSTRUCTIONS

TYPE B INSTALLATION BY-PASS REPLACEMENT (WITHOUT BALLAST)

Connected to the power supply in double-ended mode.

