

LED T8 INTEGRATED TUBE LIGHT

INT-2FT | INT-3FT | INT-4FT | INT-8FT

DESCRIPTION

T8 INTEGRATED TUBE | 2ft/3ft/4ft/8ft | Linkable & Plug and Play



CONSTRUCTION

PC + Aluminum | T8 Integrated LED Tubes

ELECTRICAL

Runs on 120-277V line voltage

LINKABLE

The ability to link multiple tube lights together allows you to customize the lighting arrangement to suit your space perfectly, providing uniform lighting across larger areas.

EASY INSTALLATION

The T8 LED Integrated Tube light doesn't need a ballast fixture, making setup easy. Just connect the provided connector and secure the fixture with the included clips and screws. This simple installation saves on maintenance and costs

LONGEVITY

LED lighting is known for its extended lifespan, reducing the need for frequent replacements and minimizing maintenance efforts.

APPLICATIONS

From residential spaces to commercial establishments, these tube lights find utility in a wide range of settings, including homes, offices, retail stores, garage, workshops, basement and more.

LISTING

ETL, DLC, FCC

WARRANTY

5 Years Limited Warranty, Rated for 50,000 hours.

FEATURES

Bulb Type	T8 LED
Size	2FT 3FT 4FT 8FT
Wattage	2FT: 15W 3FT: 22W 4FT: 22W/30W/40W 8FT: 45W/60W/72W
CCT	2700K-6500K
Efficiency	130lm/W
Input Voltage	120-277V AC
Frequency Range	50/60Hz
Linkable	Yes
Cover	Frosted / Clear
CRI	>80
PF	>0.95
THD	<=20%
Beam Angle	160°
IP Rating	IP 40
Lifetime	50,000 hours


ORDERING INFORMATION

Model	Size	Wattage	Voltage	Lumens	Efficacy	CCT	Certifications
INT-2FT-15W-XXK	2FT	15W	120-277V	1950lm	130 lm/W	2700K-6500K	ETL/DLC
INT-3FT-22W-XXK	3FT	22W	120-277V	2860lm	130 lm/W	2700K-6500K	ETL/DLC
INT-4FT-22W-XXK INT-4FT-30W-XXK INT-4FT-40W-XXK	4FT	22W, 30W, 40W	120-277V	2860lm, 3900lm, 5200lm	130 lm/W	2700K-6500K	ETL/DLC
INT-8FT-45W-XXK INT-8FT-60W-XXK INT-8FT-72W-XXK	8FT	45W, 60W, 72W	120-277V	5850lm, 7800lm, 9360lm	130 lm/W	2700K-6500K	ETL/DLC


PHYSICAL SPECIFICATIONS

Unit: mm/inch


2FT

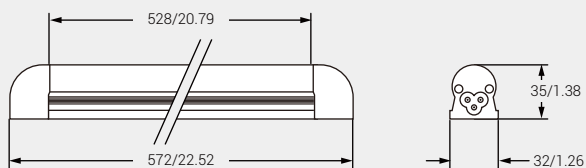


3FT

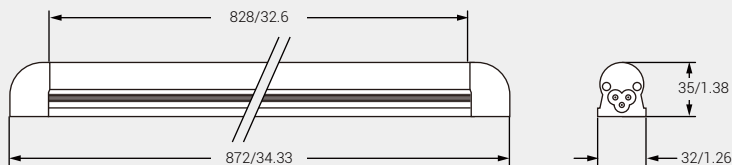

4FT

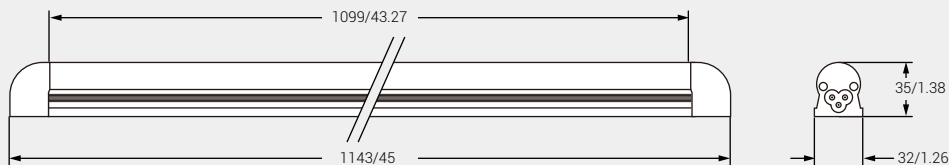


8FT

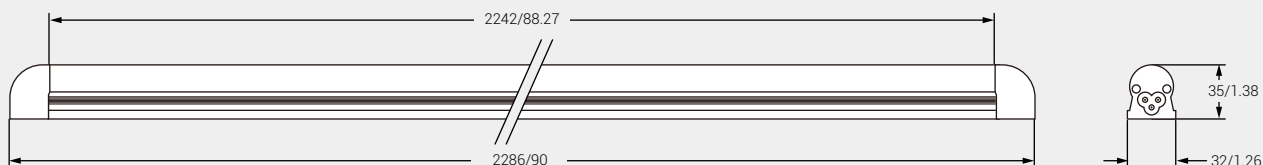

Dimensional tolerances: (+1.5mm, -1.0mm)


INSTALLATION INSTRUCTIONS

1

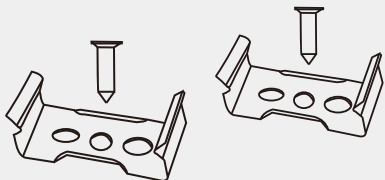


Confirm the buckle's position on the wall.

2



Screw the buckles on the wall.


3

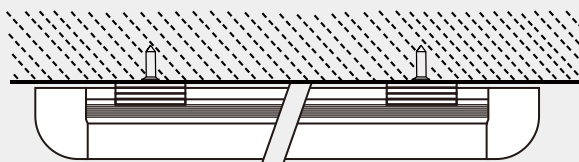


Fix the light into the buckles

CONNECTION INSTALLATION

Method 1: Connector

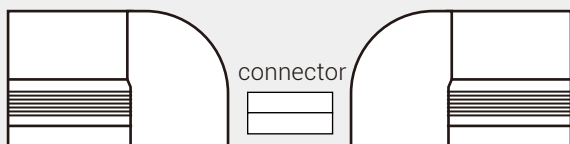


Please find the connector in the accessories bag.

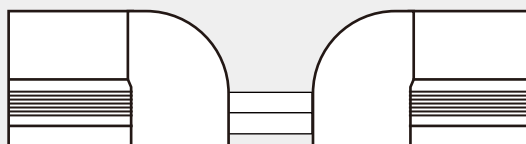

Plug the connector into the tube.

Method 2: Middle Connector

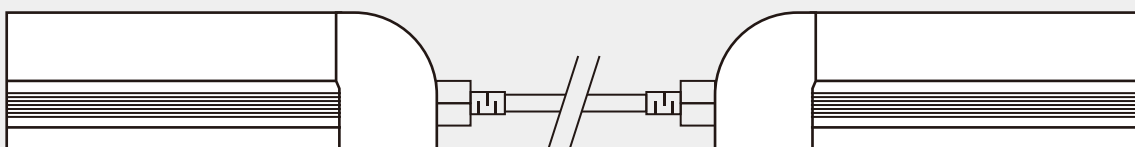

Please find the middle connector, Plug the middle connector into the tube.